


FIRST DUAL DIGITAL POT WITH DUAL SUPPLY COMPATIBILITY UP TO $\pm 12V$

Ideal For Digital Audio Applications

The DS1808 digital potentiometer enables digital audio designers to enjoy the freedom of combining digital control of audio circuits with signal levels up to $\pm 12V$. This device offers the lowest THD and crosstalk available and provides mute positions with -90dB attenuation. The DS1808 comes in a 16-pin SO and is priced starting at \$1.79.[†]

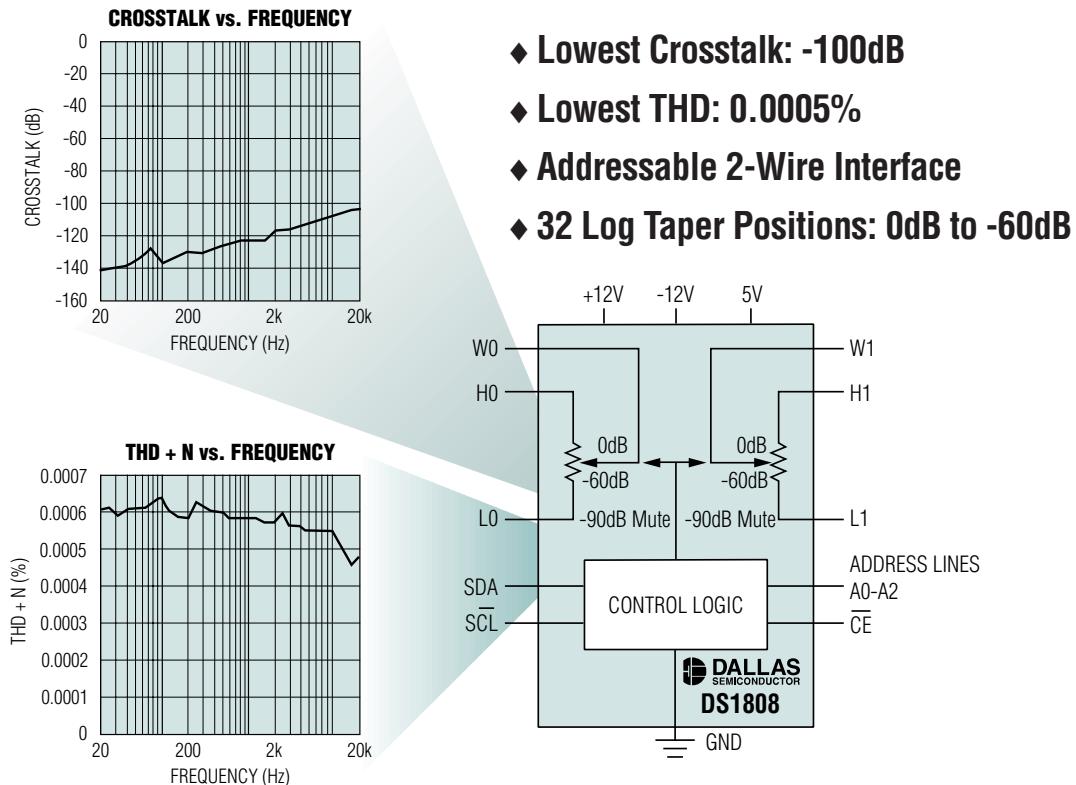

- ◆ **Lowest Crosstalk: -100dB**
- ◆ **Lowest THD: 0.0005%**
- ◆ **Addressable 2-Wire Interface**
- ◆ **32 Log Taper Positions: 0dB to -60dB**

[†]1,000-up recommend resale, FOB USA. Prices provided are for design guidance and are for the lowest grade, commercial temperature parts. International prices will differ due to local duties, taxes, and exchange rates. Prices are subject to change. Not all packages are offered in 1k increments, and some may require minimum order quantities.

CALL TOLL-FREE 1-800-998-8800 for a Free Sample
6:00 a.m. – 6:00 p.m. Pacific Time

FREE FULL-LINE DATA CATALOG
ON CD-ROM



www.maxim-ic.com



Dallas Semiconductor, 4401 South Beltwood Parkway, Dallas, Texas 75244-3292 Phone: 972-371-4000 FAX: 972-371-4470

Distributed by Maxim/Dallas Direct!, Arrow, Avnet Electronics Marketing, Digi-Key, and Newark.

Distributed in Canada by Arrow and Avnet Electronics Marketing.

MAXIM is a registered trademark of Maxim Integrated Products, Inc. © 2001 Maxim Integrated Products.