



APPLICATION NOTE 3964

Enabling Test Modes on the MAX9247

Abstract: The MAX9247 features an internal test mode, which is useful for debugging the serial link or generating a known-good test pattern for parameter measurement. This application note details the MAX9247's two primary test modes: PRBS and unencoded.

Overview of the MAX9247

The [MAX9247](#) is a 27-bit, 2.5MHz to 42MHz DC-balanced LVDS serializer. Intended for transmitting digital video in automotive applications, it converts three 6-bit words into a single LVDS data stream. This data stream is then deserialized by devices such as the [MAX9218](#), [MAX9248](#), or the [MAX9250](#).

Enabling Test Modes

The first test mode generates a pseudorandom-binary-sequence (PRBS) data stream. In this mode, the external RGB inputs are ignored and can be tied high or low, or they can be left floating due to their internal pull-down resistors. The MAX9247 automatically generates an internal DE_IN signal. The DE_IN signal is asserted after 128 consecutive PRBS data words, inserting a transition word in the output data stream. The PRBS test mode is useful for generating an eye diagram on the receiving end; this eye diagram provides a quick qualitative analysis of the link integrity.

The second test mode generates an unencoded output data stream. In this mode, the external RGB inputs are transferred directly to their corresponding slot in the serial data stream with no encoding. The external RGB inputs can be driven with a data source, tied high or low, or left floating due to their internal pull-down resistors. The system must still generate its own periodic DE_IN signal to load transition words for proper operation. The unencoded test mode is useful for generating specific and predictable output data streams, such as those needed for worst-case EMC testing.

Both test modes are selected by pulling pin 24 (I.C.) and pin 25 (PRE) below ground. As **Figure 1** illustrates, each pin must be current limited with a 1k Ω series resistor. A negative bias voltage of 3V is needed to ensure that the device enters test mode.

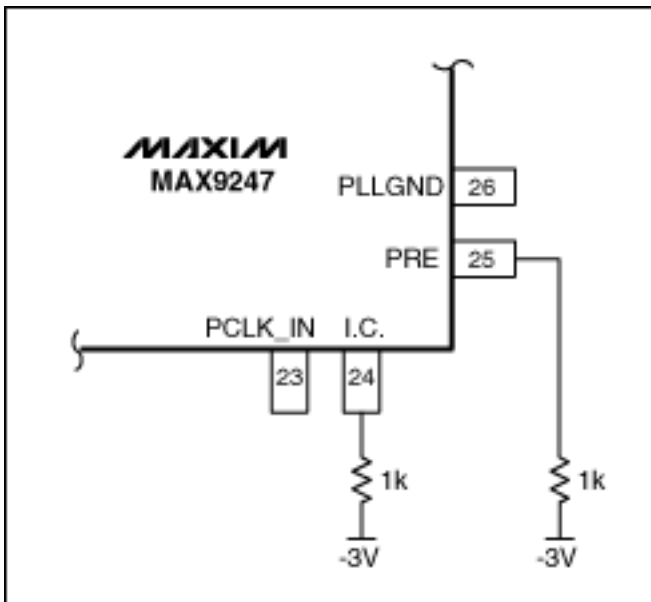


Figure 1. Two resistors bias the MAX9247 into test mode.

The two test modes are selected through active-low PWRDWN (see **Table 1**).

Table 1. Test Modes Selected Through Active-Low PWRDWN

ACTIVE-LOW PWRDWN	TEST MODE
0	Internal PRBS
1	External Unencoded

Application Note 3964: www.maxim-ic.com/an3964

More Information

For technical support: www.maxim-ic.com/support

For samples: www.maxim-ic.com/samples

Other questions and comments: www.maxim-ic.com/contact

Automatic Updates

Would you like to be automatically notified when new application notes are published in your areas of interest?
[Sign up for EE-Mail™.](#)

Related Parts

MAX9218: [QuickView](#) -- [Full \(PDF\) Data Sheet](#) -- [Free Samples](#)

MAX9247: [QuickView](#) -- [Full \(PDF\) Data Sheet](#)

MAX9248: [QuickView](#) -- [Full \(PDF\) Data Sheet](#)

MAX9250: [QuickView](#) -- [Full \(PDF\) Data Sheet](#)

AN3964, AN 3964, APP3964, Appnote3964, Appnote 3964

Copyright © by Maxim Integrated Products

Additional legal notices: www.maxim-ic.com/legal